
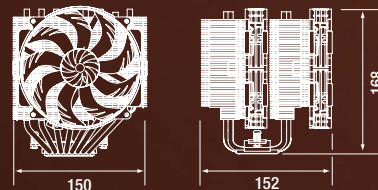


NH-D15 G2 HBC

NEXT-GEN D-TYPE PREMIUM COOLER

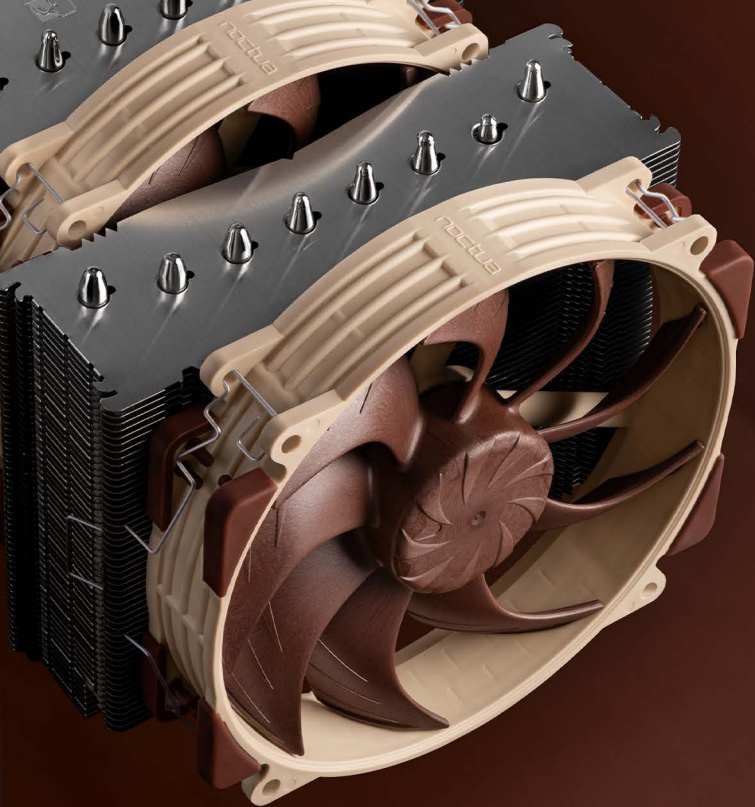

LOGISTIC DATA

Product name
Noctua NH-D15 G2 HBC

EAN
9010018000436

UPC
841501100437

Packaging dimensions (HxWxD)
239x188x188 mm

Weight incl. packaging
2460 g

Warranty
6 years

Packaging unit
8 pcs

Packaging dimensions / unit (HxWxD)
515x400x400 mm

Weight incl. packaging / unit
21.00 kg

SCOPE OF DELIVERY

NH-D15 G2 HBC Heatsink
2x NF-A14x25r G2 PWM premium fan
2x NA-RC16 Low-Noise Adaptor (L.N.A.)
NA-YC1 4-pin PWM splitter cable
NT-H2 high-grade thermal compound
NA-TPG1 thermal paste guard for AM5
NA-CW1 cleaning wipe
SecuFirm2+™ multi-socket mounting system
4x NM-ISW1 shim washers for LGA1700
NM-SD1 Torx® T20 screwdriver
Noctua metal case-badge

NH-D15 G2 is further improved Noctua's iconic NH-D15 series' second generation product. With its advanced speed-tunable NF-A14x25r G2 PWM fan, eight heat pipes and through carefully tuned asymmetric cooling fins, working in synergy with the new fan, it achieves a better quiet cooling performance than its predecessor. Therefore, G2 is a true flagship model, breaking the limits of air cooling, and can be compared with many AIO (All-in-One) liquid cooling solutions in terms of efficiency. G2 is a true flagship model, breaking the limits of air cooling, and can be compared with many AIO (All-in-One) liquid cooling solutions in terms of efficiency. G2 is a true flagship model, breaking the limits of air cooling, and can be compared with many AIO (All-in-One) liquid cooling solutions in terms of efficiency.

新一代性能

整整十年来，原先的NH-D15被广泛认为是市场上优质的风冷散热器。G2型号延续了这一传统，进一步提高了上代产品其标志性的著名的静音散热性能。特别是在具有挑战性的更高热负荷的情况下，NH-D15 G2可以将温度降低好几度，提供更高的散热空间，从而实现更高的涡轮时钟速度。

8根热管可在更高热负荷下提供更好的性能

与原来的NH-D15相比，NH-D15 G2使用了8根热管，而不是6根。额外热管的热容量增加在极端热负荷（例如250W及以上）下尤其有用，此时性能比原来的NH-D15提升更大。

专业HBC（高底部凸度）版本

高底部凸度（HBC）版本在CPU上实现了更好的接触压力，当插槽由于ILM（独立加载机制）的压力而关闭时，CPU会变得非常凹陷。因此，如果没有使用垫圈或所谓的防接触框架来降低ILM压力，或者是CPU在长期使用中导致永久变形，那么它是Intel LGA1700处理器的理想选择。有关更多详细信息，请参阅本常见问题解答。

6年制造商的保修

Noctua产品以其无可挑剔的品质和出色的使用寿命而著名。正如这一传统一样，NH-D15 G2散热器经久耐用，与所有Noctua风扇一样，所提供的NF-A14x25r G2风扇的平均无故障运行时间超过150,000小时。提供6年制造商的保修。

NH-D15 G2 HBC HEATSINK SPECIFICATIONS

插槽兼容性	AMD AM5, AM4 and Intel LGA1851, LGA1700, LGA1200, LGA1156, LGA1155, LGA1151, LGA1150
尺寸	168x150x152 mm
安装2x NF-A14x25r G2 PWM后尺寸	168x150x152 mm
重量	1180 g
安装2x NF-A14x25r G2 PWM后重量	1525 g
材质	铜(底部与散热管), 铝(冷却鳍片), 焊接接缝, 镀镍
兼容风扇	2x NF-A14x25r G2 PWM

NF-A14x25r G2 PWM FAN SPECIFICATIONS

尺寸	140x140x25 mm	
连接头	4-pin PWM	
轴心	SS02	
叶片设计	Progressive-Bend impeller	
框架技术	AAO (Advanced Acoustic Optimisation)	
输入功率上限	2.28 W	
电压	12 V	
平均无故障运行时间	> 150,000 h	
NF-A14x25r G2 PWM	without adaptor	with L.N.A.
转速 (+/- 10%)	1500 RPM	1250 RPM
气流(m³/h)	155.6 m³/h	127.1 m³/h
噪音 dB(A)	24.8 dB(A)	19.7 dB(A)
静压 (mmH2O)	2.56 mmH2O	1.3 mmH2O

设计于奥地利，NOCTUA的优质散热凭借他们精湛的安静，卓越的性能和优质的质量得到了很高的知名度，收到了1000多个硬件网站和杂志的推荐及奖项。NOCTUA的风扇和散热器一百万忠实用户遍布全球。



www.noctua.at