


NF-A14x25 G2 LS-PWM

Premium-Quality Ultra-Quiet 140mm PC Fan

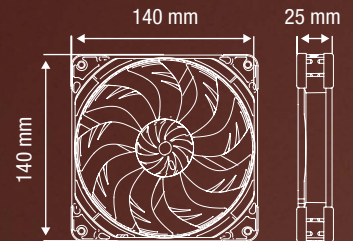

LOGISTIC DATA

Product name

Noctua NF-A14x25 G2 LS-PWM

EAN

9010018100624

UPC

841501110627

Packaging dimensions (HxWxD)

33x199x148 mm

Weight incl. packaging

365 g

Warranty

6 years

Packaging unit

40 pcs

Packaging dimensions / unit (HxWxD)

342x425x373 mm

Weight incl. packaging / unit

15.40 kg

SCOPE OF DELIVERY

NF-A14x25 G2 LS-PWM premium fan

NA-RC8 Low-Noise Adaptor (L.N.A.)

NA-YC1 4-pin PWM splitter cable

NA-EC1 30cm extension cable

4x NA-AV2 anti-vibration mounts

NA-AVG2-LR anti-vibration gasket

4x NA-AVP1-LR load-relief

anti-vibration pads

4x fan screws

Succeeding the award-winning NF-A14 and building on the technological innovations of the ground-breaking NF-A12x25, the NF-A14x25 G2 is Noctua's next-generation square-frame 140mm flagship model: Made from Sterrox® LCP, its highly optimised Progressive-Bend impeller with winglets, Flow Acceleration Channels and Centrifugal Turbulator hub combined with a tip-clearance of only 0.7mm allow the NF-A14x25 G2 to further improve its predecessor's renowned quiet cooling performance. Like the NF-A14 and NF-A12x25, it is a true all-rounder that yields superb results in all types of usage, regardless of whether it's in low-impedance, airflow-oriented applications such as case cooling, or high-impedance, static pressure demanding scenarios such as on heatsinks and water cooling radiators. For application-specific optimisation, the NF-A14x25 G2 comes with an NA-AVG2-LR anti-vibration gasket pre-installed to create a tighter seal on radiators. Additionally, its AAO (Advanced Acoustic Optimisation) frame can be combined with the optional NA-IS1-14 inlet spacer, which can help to achieve superior suction acoustics and flow rates in challenging intake configurations. The 4-pin LS-PWM version is a low-speed, PWM-enabled variant that is ideal for semi-passive setups or ultra-low-noise applications that require near-silent acoustics and PWM based speed control. Its super-low-loss etaPERF™ motor with Smooth Commutation Drive 2 technology combines unprecedented energy efficiency with a superb running smoothness that is guaranteed to satisfy even the most noise-sensitive users. Topped off with Noctua's reference-class SSO2 bearing, a rich bundle of accessories and 6-year manufacturer's warranty, the NF-A14x25 G2 is a premium-quality product through and through. Its superior performance, comprehensive feature set, cutting-edge construction and state-of-the-art materials set a new standard within Noctua's portfolio and make it an elite choice for the most discerning demands.

Next-generation performance

Noctua's NF-A15 is renowned as being among the best round-frame 140mm fans on the market and has received more than 100 awards and recommendations from the international press. With its further improved efficiency and novel, state-of-the-art engineering, the NF-A14x25 G2 represents another step up in performance and manufacturing.

Highly optimised P/Q curve for all applications

The NF-A14x25 G2's sophisticated aerodynamic design allows for a pressure to airflow (P/Q) curve that is extremely strong in the critical mid-section. This means that the NF-A14x25 G2 is a true jack-of-all-trades with excellent performance in both static pressure and airflow demanding applications.

Excellent on-application acoustics

While many fans produce unpleasant, high-pitched noises when installed in typical applications such as on heatsinks or radiators, the NF-A14x25 G2 has been carefully fine-tuned for optimal on-application acoustics. It produces a smooth, pleasant frequency profile and surprisingly low sound pressure levels (SPL) when working against back pressure.

6-year manufacturer's warranty

Noctua fans are renowned for their impeccable quality and outstanding longevity. Like all Noctua fans, the NF-A14x25 G2 features an MTTF of more than 150,000 hours rating and comes with a full 6-year manufacturer's warranty.

NF-A14x25 G2 LS-PWM FAN SPECIFICATIONS

Dimensions	140x140x25 mm	
Connector	4-pin PWM	
Bearing	SSO2	
Blade geometry	Progressive-Bend impeller	
Frame technology	AAO (Advanced Acoustic Optimisation)	
Max. input power	2.28 W	
Voltage	12 V	
MTTF	> 150,000 h	
NF-A14x25 G2 LS-PWM	without adaptor	with L.N.A.
Rotational speed (+/-10%)	800 RPM	600 RPM
Airflow (m³/h)	81.6 m³/h	67.5 m³/h
Acoustical noise dB(A)	11.4 dB(A)	8.6 dB(A)
Static pressure (mmH₂O)	0.71 mmH₂O	0.43 mmH₂O

Designed in Austria, Noctua's premium cooling components are internationally renowned for their superb quietness, exceptional performance and thoroughgoing quality. Having received more than 6000 awards and recommendations from leading hardware websites and magazines, Noctua's fans and heatsinks are chosen by more than a hundred thousand satisfied customers around the globe.

CE UK RoHS
PRODUCED ACCORDING TO ISO9001 & ISO14001
Noctua Computer Peripherals GmbH | Dorn Strasse 2/7, 1140 Vienna, AT

www.noctua.at